



(11)

**EP 1 684 945 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**01.08.2007 Bulletin 2007/31**

(51) Int Cl.:  
**B24D 13/16 (2006.01)**

(21) Application number: **05708934.4**

(86) International application number:  
**PCT/IB2005/050799**

(22) Date of filing: **03.03.2005**

(87) International publication number:  
**WO 2005/087436 (22.09.2005 Gazette 2005/38)**

(54) **SANDING ELEMENT**

SCHLEIFELEMENT

ELEMENT DE PON AGE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**  
Designated Extension States:  
**AL BA HR LV MK YU**

(30) Priority: **03.03.2004 BE 200400116**

(43) Date of publication of application:  
**02.08.2006 Bulletin 2006/31**

(73) Proprietor: **CIBO N.V.  
3150 Tildonk (BE)**

(72) Inventor: **Gilles, Dominique  
3150 Tildonk (BE)**

(74) Representative: **Callewaert, Jean  
Bureau Callewaert b.v.b.a.  
Brusselsesteenweg 108  
3090 Overijse (BE)**

(56) References cited:  
**EP-A- 1 093 885 US-A- 3 529 385  
US-A- 5 752 876**

**EP 1 684 945 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention concerns a sanding element with a succession of overlapping lamellas containing sanding grains, as per the preamble of claim 1. An example of such a sanding element is disclosed in EP-A-1 093 885

**[0002]** Such sanding elements are usually made in the form of what is called a laminated disc, whereby successive lamellas are arranged according to the peripheral direction of the disc and overlap. These sanding elements are used for example for sanding en finishing, more particularly for polishing welds on metal workpieces.

**[0003]** American patent US 6 582 289 describes a laminated disc with a succession of overlapping lamellas. These lamellas are alternately formed of abrasive cloth containing sanding grains and lamellas provided with an active sanding layer. Such an active sanding layer contains no sanding grains, provides mainly for the removal of removed material and reduces the heating of the workpiece to be sanded.

**[0004]** However, the existing sanding elements are disadvantageous in that they get into a relatively hard contact with the surface of a workpiece to be treated, such that it is difficult to exert a constant pressure between the workpiece and the sanding element. Moreover, the existing sanding elements have a relatively short life and, after a metal surface has been sanded with such an aggressive sanding element, this surface must be further treated with what is called a finishing disc in order to obtain a smooth and aesthetically acceptable surface.

**[0005]** The invention aims to remedy these disadvantages by providing a sanding element with a much longer life than the present sanding elements, while it allows to finish a workpiece almost to perfection in a very fast manner, as a result of which the use of two different discs is no longer necessary. The sanding element according to the invention has the features of claim 1, and makes it possible to remove material from the workpiece as well as to perfectly finish the workpiece, both from an aesthetic and a technical point of view. More particularly, with the sanding element according to the invention, very low roughness values of the surface of a workpiece can be obtained in a single step.

**[0006]** To this aim, said lamellas are alternately formed of sanding lamellas and compressible lamellas, such that every sanding lamella rests on a compressible lamella.

**[0007]** Practically, these compressible lamellas are elastically compressible.

**[0008]** In an advantageous manner, said compressible lamellas contain non-woven fibres, more particularly non-woven synthetic fibres.

**[0009]** According to a preferred embodiment of the sanding element according to the invention, sanding grains are provided on said fibres.

**[0010]** According to an interesting embodiment of the sanding element according to the invention, said fibres

are joined together by means of gluing, for example by means of a synthetic resin, and thus have a three-dimensional open fibre structure.

**[0011]** Preferably, said lamellas are fixed on a round, disc-shaped support, whereby the free edges of these lamellas extend practically radially, such that the sanding element forms what is called a laminated disc.

**[0012]** Other particularities and advantages of the sanding element according to the invention will become clear from the following description of a few special embodiments of the invention; this description is given as an example only and does not restrict the scope of the claimed protection in any way; the figures of reference used hereafter refer to the accompanying drawings.

**[0013]** Figure 1 is a schematic view from above of the sanding element according to the invention.

**[0014]** Figure 2 is a schematic side-view according to line II-II of the sanding element from figure 1.

**[0015]** Figure 3 is a schematic cross section to a larger scale of a compressible lamella according to the invention, represented in greater detail.

**[0016]** Figure 4 schematically represents a view from above of two pipes which are welded together at an angle of 90°.

**[0017]** In the different drawings, identical figures of reference refer to the same elements.

**[0018]** The invention generally concerns a sanding element, more particularly a laminated disc, which contains successive overlapping lamellas. These lamellas are alternately formed of sanding lamellas, whose outer surface or free surface is provided with sanding grains, and compressible lamellas upon which the sanding lamellas rest.

**[0019]** Figure 1 represents such a sanding element in the form of a laminated disc 1. The latter contains an almost non-deformable round, disc-shaped support 2 upon which a sanding lamella 3 and a compressible lamella 4 are alternately fixed, in such a manner that each lamella 4 overlaps with a sanding lamella 3. The sanding lamella 3 hereby each time rests with its operational part on a corresponding compressible lamella 4.

**[0020]** Said support 2 has a central opening 5 via which the laminated disc 1 can be mounted on a drive in a manner known as such. This drive, which is not represented in the figures, makes it possible to rotate the laminated disc 1 at high speed around its axis, whereas the disc 1 is pressed against a workpiece, such that the lamellas 3 and 4 make contact with a surface of said workpiece to be finished.

**[0021]** The disc according to the invention hereby makes an even contact with the surface of the workpiece with an almost uniform pressure, thanks to the compressibility of the lamellas 4.

**[0022]** The sanding lamellas 3 are formed for example of a cotton or polyester textile fabric onto which are fixed sanding grains by means of a bonding layer. Thus, such lamellas 3 are formed for example of abrasive cloth. However, these lamellas may also be formed of a paper, a

polyester or a mixed support such as polyester cotton onto which are provided sanding grains.

**[0023]** The compressible lamellas 4 mainly consist of fibres 10. More particularly, these compressible lamellas 4 are formed of non-woven synthetic fibres 10 which are joined together by means of a synthetic resin and thus have a three-dimensional open fibre structure. This fibre structure is glued onto a woven base 11, or anchored thereto in another manner.

**[0024]** Further, sanding grains 9 are provided on the fibres 10 via this synthetic resin. In order to make sure that, when using the laminated disc 1, the fibres 10 will stick to each other, irrespective of the heat that is produced while sanding, a thermosetting synthetic resin is preferably used as said synthetic resin. The synthetic fibres 10 are formed for example of polyamide yarns having a diameter between 0.75 and 0.85 mm.

**[0025]** Thus, these compressible lamellas 4 form an open three-dimensional structure which is elastically deformable. The fibres 10 extend in this structure in an almost disorderly manner. Figure 3 represents a cross section of such a compressible lamella 4.

**[0026]** As the lamellas 3 and 4 overlap, each sanding lamella 3 is at least partly supported by a compressible lamella 4. When the laminated disc 1 thus makes contact with the surface of a workpiece to be finished, a practically homogenous pressure will be exerted in the contact surface between said workpiece and the laminated disc 1, as already mentioned above.

**[0027]** In order to make sure that a relatively soft contact is made between the surface of the workpiece and the laminated disc 1, the thickness of the compressible lamellas 4 is preferably at least equal to three times the thickness of said sanding lamellas 3.

**[0028]** According to an interesting embodiment of the sanding element according to the invention, the thickness of the sanding lamellas 3 is almost 0.5 mm to 1 mm, whereas the thickness of the compressible lamellas 4 is for example in the order of magnitude of 3 to 8 mm. Every lamella 3 and 4 forms a rectangle with a short side 6 having a length of almost 20 mm and a long side 7 of some 30 mm. The long side 7 of the top side of the lamellas 3 and 4, or in other words the free edge thereof, extends practically radially onto the support 2, whereas the short side 6 is situated in a tangent plane on the circumference of the lamellas.

**[0029]** The lamellas 3 and 4 overlap in the direction of their short side 6, over a distance which is practically equal to 2/3 to 5/6 of the length of this short side 6. The lamellas 3 and 4 preferably overlap over a distance of 3/4 of the length of the short side 6.

**[0030]** The lamellas 3 and 4 are fixed tightly to said support 2 by means of a layer of glue 8.

**[0031]** The laminated disc 1 according to the invention is particularly interesting when it is used in order to remove a surface layer on metal surfaces.

**[0032]** Figure 4 schematically represents a workpiece consisting of two pipes 12 and 13 made of stainless steel

with a diameter of 40 mm which are welded together at right angles. The formed weld 14 extends at an angle of 45° in relation to the axis of the pipes 12 and 13.

**[0033]** According to the state of the art, after sanding with a conventional aggressive sanding instrument such as a fibre disc, a lamella sanding disc, a trimming disc, etc., such a weld 14 of the workpiece is smoothened by means of what is called a conventional finishing disc, which mainly has a three-dimensional open fibre structure in which are provided sanding grains.

**[0034]** In some cases, it is possible to sand and finish the workpiece in a single step with one and the same finishing disc. In that case, the finishing disc will be entirely worn after smoothening the surface of five workpieces. When the same finishing process is carried out by means of the laminated disc 1 according to the invention, it is found that one and the same disc can treat sixteen of such workpieces before the disc has worn out.

**[0035]** Moreover, it was found that in order to smooth 25 welded joints by means of said conventional finishing disc, a processing time of 41 minutes and 36 seconds was required. When 25 identical welded joints are smoothened by means of the laminated disc according to the invention, only 23 minutes and 52 seconds are required.

**[0036]** Thus, on the basis of these tests it was found that, with the laminated disc according to the invention, one can work almost twice as fast as with a conventional finishing disc. Further, it turned out that the life of the laminated disc according to the invention is more than three times the life of a conventional finishing disc.

**[0037]** The sanding lamellas and the compressible lamellas may contain all sorts of sanding grains, such as for example ceramic sanding grains or aluminium oxide grains, zirconium oxide grains, silicon carbide or an agglomerate of these grains. Very good results were obtained with what are called structured sanding grains which are described for example in European patent EP 1 011 924 and which are provided for example according to a regular pattern and with a specific orientation on the lamellas of the sanding element. Such structured grains are formed for example of conventional sanding grains whose surface is coated with what are called functional powders, such as very fine sanding grains, antistatic additives, lubricants, etc.

**[0038]** Further, the sanding lamellas 3 and/or the compressible lamellas 4 may be composed of several lamellas of the same type. Thus, it is also possible that the sanding element contains a succession of overlapping groups of lamellas, whereby these groups are alternately formed of at least one sanding lamella 3 and at least one compressible lamella 4. Each group of sanding lamellas 3 hereby rests on a group of compressible lamellas 4. This implies among others that a group of sanding lamellas containing for example two or more sanding lamellas 3 can rest on only one compressible lamella 4 or that for example each sanding lamella 3 can rest on a group of compressible lamellas 4. The lamellas of each group of

lamellas preferably overlap.

[0039] In another embodiment of the sanding element according to the invention, the lamellas 3 and 4 should not necessarily be fixed onto a disc-shaped support, but they could also be fixed for example onto a closed belt.

[0040] The sanding element according to the invention cannot only be applied to finish welded joints made of stainless steel, but it can also be used to improve the surface roughness in general of any material whatsoever, such as for example, iron alloys, ferrous and non-ferrous alloys, stone, plastics, etc.

#### Claims

1. Sanding element with a succession of overlapping lamellas (3,4) containing sanding grains (9) these lamellas (3,4) being alternately formed of sanding lamellas (3) and compressible lamellas (4), **characterised in that** each sanding lamella (3) rests with its operational part on a compressible lamella (4) and is supported by this compressible lamella (4).
2. Sanding element according to claim 1, **characterised in that** said compressible lamellas (4) contain sanding grains (9).
3. Sanding element according to claim 1 or 2, **characterised in that** said sanding lamella (3) and/or the compressible lamella (4) is a group of several lamellas of the type concerned.
4. Sanding element according to any one of claims 1 to 3, **characterised in that** said compressible lamellas (4) are elastically compressible.
5. Sanding element according to any one of claims 1 to 4, **characterised in that** said compressible lamellas (4) have an open structure.
6. Sanding element according to any one of claims 1 to 5, **characterised in that** said compressible lamellas (4) contain non-woven fibres (10), more particularly non-woven synthetic fibres (10).
7. Sanding element according to claim 6, **characterised in that** sanding grains (9) are provided on said fibres (10).
8. Sanding element according to claim 6 or 7, **characterised in that** said fibres (10) are joined together by means of a synthetic resin and thus form a three-dimensional open fibre structure.
9. Sanding element according to claim 8, **characterised in that** sanding grains (9) adhere to said fibres (10) by means of the above-mentioned synthetic resin.

10. Sanding element according to any one of claims 1 to 9, **characterised in that** said sanding lamellas (3) are formed of abrasive cloth.

11. Sanding element according to any one of claims 1 to 10, **characterised in that** the thickness of said compressible lamellas (4) is at least equal to three times the thickness of said sanding lamellas (3).

12. Sanding element according to any one of claims 1 to 11, **characterised in that** said lamellas (3,4) are fixed on a round, disc-shaped support (2), whereby the free edges (7) of these lamellas (3,4) extend almost radially.

13. Sanding element according to claim 3, **characterised in that** each group of sanding lamellas (3) rests on a group of compressible lamellas (4) and a sanding lamella (3) of each group of sanding lamellas (3) rests with its operational part on a compressible lamella (4).

14. Sanding element according to claim 13, **characterised in that** the lamellas of each group of lamellas overlap one another.

15. Sanding element according to claim 13 or 14, **characterised in that** said group of sanding lamellas (3) contains two sanding lamellas (3) and rests on only one compressible lamella (4).

#### Patentansprüche

1. Schleifelement mit einer Abfolge einander überlappender Lamellen (3, 4), die Schleifkörner (9) enthalten, wobei diese Lamellen (3, 4) abwechselnd aus Schleiflamellen (3) und komprimierbaren Lamellen (4) gebildet sind, **dadurch gekennzeichnet, dass** jede Schleiflamelle (3) mit ihrem operativen Teil auf einer komprimierbaren Lamelle (4) aufliegt und von dieser komprimierbaren Lamelle (4) getragen wird.
2. Schleifelement nach Anspruch 1, **dadurch gekennzeichnet, dass** die komprimierbaren Lamellen (4) Schleifkörner (9) enthalten.
3. Schleifelement nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die Schleiflamelle (3) und/oder die komprimierbare Lamelle (4) eine Gruppe mehrerer Lamellen des betreffenden Typs ist.
4. Schleifelement nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die komprimierbaren Lamellen (4) elastisch komprimierbar sind.
5. Schleifelement nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** die komprimierba-

ren Lamellen (4) eine offene Struktur haben.

6. Schleifelement nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** die komprimierbaren Lamellen (4) Vliesfasern (10) enthalten, insbesondere synthetische Vliesfasern (10). 5
7. Schleifelement nach Anspruch 6, **dadurch gekennzeichnet, dass** auf den Fasern (10) Schleifkörner (9) vorgesehen sind. 10
8. Schleifelement nach Anspruch 6 oder 7, **dadurch gekennzeichnet, dass** die Fasern (10) mit einem Kunstharz verbunden sind und dadurch eine dreidimensionale, offene Faserstruktur bilden. 15
9. Schleifelement nach Anspruch 8, **dadurch gekennzeichnet, dass** die Schleifkörner (9) mittels des Kunstharzes an den Fasern (10) haften. 20
10. Schleifelement nach einem der Ansprüche 1 bis 9, **dadurch gekennzeichnet, dass** die Schleiflamellen (3) aus abrasivem Tuch gebildet sind. 25
11. Schleifelement nach einem der Ansprüche 1 bis 10, **dadurch gekennzeichnet, dass** die Dicke der komprimierbaren Lamellen (4) mindestens drei Mal der Dicke der Schleiflamellen (3) entspricht. 30
12. Schleifelement nach einem der Ansprüche 1 bis 11, **dadurch gekennzeichnet, dass** die Lamellen (3, 4) auf einer runden, scheibenartigen Unterlage (2) befestigt sind, wobei die freien Ränder (7) dieser Lamellen (3, 4) sich beinahe radial erstrecken. 35
13. Schleifelement nach Anspruch 3, **dadurch gekennzeichnet, dass** jede Gruppe von Schleiflamellen (3) auf einer Gruppe komprimierbarer Lamellen (4) und dass eine Schleiflamelle (3) jeder Gruppe von Schleiflamellen (3) mit ihrem operativen Teil auf einer komprimierbaren Lamelle (4) aufliegt. 40
14. Schleifelement nach Anspruch 13, **dadurch gekennzeichnet, dass** die Lamellen jeder Lamellengruppe einander überlappen. 45
15. Schleifelement nach Anspruch 13 oder 14, **dadurch gekennzeichnet, dass** die Gruppe von Schleiflamellen (3) zwei Schleiflamellen (3) enthält und auf nur einer komprimierbaren Lamelle (4) aufliegt. 50

#### Revendications

1. Élément de ponçage comprenant une succession de lamelles chevauchantes (3, 4) contenant des grains de ponçage (9), lesdites lamelles (3, 4) étant alternativement constituées de lamelles de ponçage 55

(3) et de lamelles compressibles (4), **caractérisé en ce que** la partie opérationnelle de chaque lamelle de ponçage (3) repose sur une lamelle compressible (4) et est supportée par cette lamelle compressible (4).

2. Élément de ponçage selon la revendication 1, **caractérisé en ce que** lesdites lamelles compressibles (4) contiennent des grains de ponçage (9) .
3. Élément de ponçage selon la revendication 1 ou 2, **caractérisé en ce que** lesdites lamelles de ponçage (3) et/ou les lamelles compressibles (4) forment un groupe de plusieurs lamelles du type concerné.
4. Élément de ponçage selon l'une quelconque des revendications 1 à 3, **caractérisé en ce que** lesdites lamelles compressibles (4) sont élastiquement compressibles.
5. Élément de ponçage selon l'une quelconque des revendications 1 à 4, **caractérisé en ce que** lesdites lamelles compressibles (4) présentent une structure ouverte.
6. Élément de ponçage selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** lesdites lamelles compressibles (4) contiennent des fibres non tissées (10), plus particulièrement des fibres synthétiques non tissées (10) .
7. Élément de ponçage selon la revendication 6, **caractérisé en ce que** des grains de ponçage (9) sont prévus sur lesdites fibres (10).
8. Élément de ponçage selon la revendication 6 ou 7, **caractérisé en ce que** lesdites fibres (10) sont jointes les unes aux autres au moyen d'une résine synthétique et forment ainsi une structure fibreuse ouverte tridimensionnelle.
9. Élément de ponçage selon la revendication 8, **caractérisé en ce que** les grains de ponçage (9) adhèrent auxdites fibres (10) au moyen de la résine synthétique mentionnée ci-dessus.
10. Élément de ponçage selon l'une quelconque des revendications 1 à 9, **caractérisé en ce que** lesdites lamelles de ponçage (3) sont constituées d'une toile abrasive.
11. Élément de ponçage selon l'une quelconque des revendications 1 à 10, **caractérisé en ce que** l'épaisseur desdites lamelles compressibles (4) est au moins égale au triple de l'épaisseur desdites lamelles de ponçage (3).
12. Élément de ponçage selon l'une quelconque des re-

ventions 1 à 11, **caractérisé en ce que** lesdites lamelles (3, 4) sont fixées sur un support rond en forme de disque (2), dans lequel les bords libres (7) de ces lamelles (3, 4) s'étendent presque radialement.

5

13. Élément de ponçage selon la revendication 3, **caractérisé en ce que** chaque groupe de lamelles de ponçage (3) repose sur un groupe de lamelles compressibles (4), et la partie opérationnelle d'une lamelle de ponçage (3) de chaque groupe de lamelles de ponçage (3) repose sur une lamelle compressible (4). 10
14. Élément de ponçage selon la revendication 13, **caractérisé en ce que** les lamelles de chaque groupe de lamelles se chevauchent mutuellement. 15
15. Élément de ponçage selon la revendication 13 ou 14, **caractérisé en ce que** ledit groupe de lamelles de ponçage (3) contient deux lamelles de ponçage (3) et repose sur une seule lamelle compressible (4). 20

25

30


35

40


45

50


55

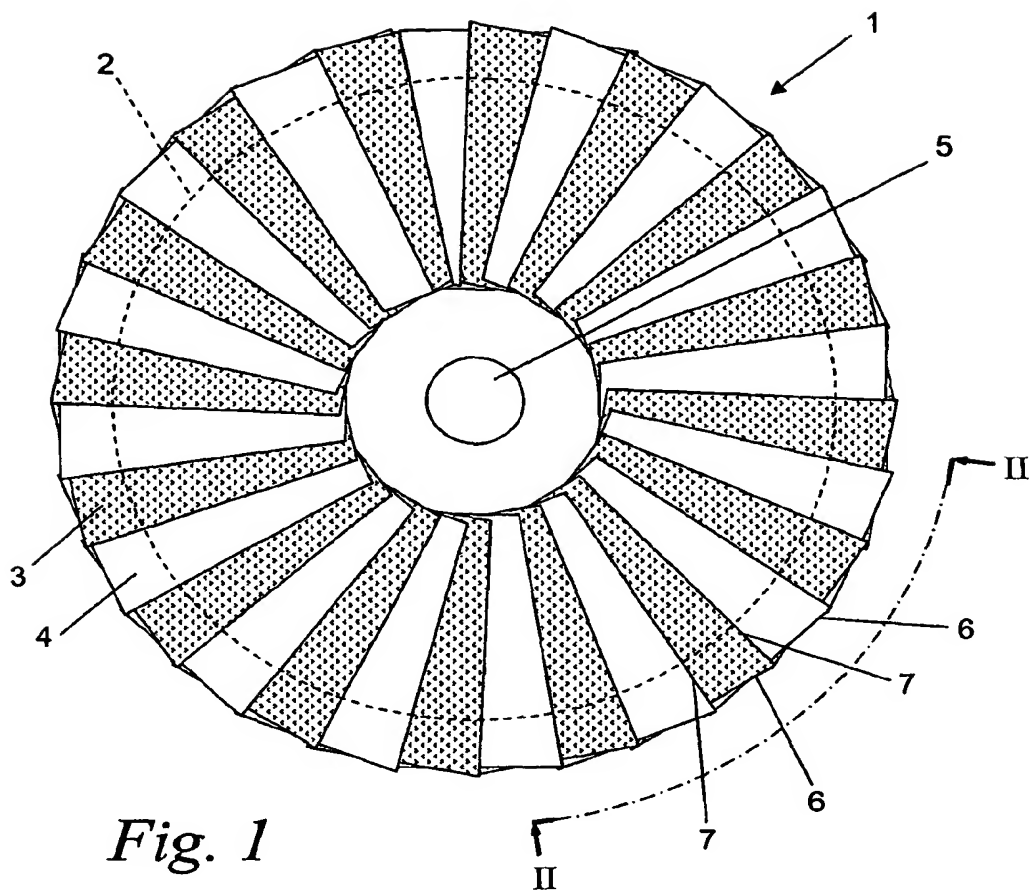


*Fig. 1*

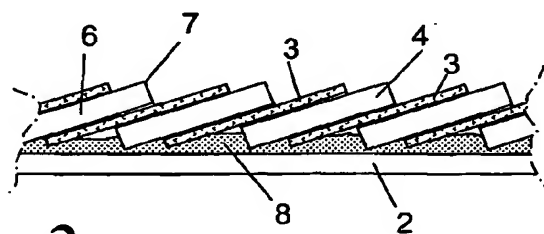

*Fig. 2*

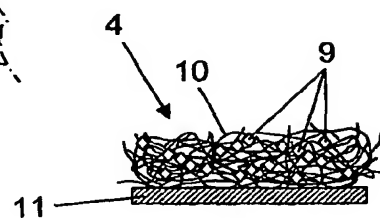

*Fig. 3*

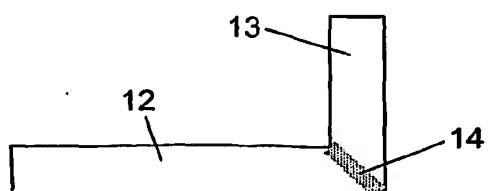

*Fig. 4*

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 1093885 A [0001]
- US 6582289 B [0003]
- EP 1011924 A [0037]